

## 500 SERIES

and Models 444 and 680SS

- Oil-Fired, LP- or Natural-Gas-Fired
- 115V/1PH
- Direct-Drive Pump



The **500 Series** delivers rugged, yet affordable, cleaning power for a broad range of applications, from agriculture to building maintenance. The sporty 555SS, with its stainless steel coil skin, is our most popular entry level hot water model—compact, evenly balanced, easy to maneuver, and engineered with the operator in mind. As with the entire Hotsy line, all models in the 500 series are ETL safety certified to UL-1776, with Hotsy pumps backed by a 7-year limited warranty

MODEL	GPM	PSI	HP	VOLT/PH	AMP	FUEL	PUMP	DRIVE	PORTABILITY	HOSE	SHIP WT (lbs)
444	2	1000	1.5	115/1	15	Oil	Comet Axial	Direct	Std	40'	335
555SS	2.2	1300	2	115/1	20	Oil	Hotsy Duplex	Direct	Std	50'	370
558	2.2	1300	2	115/1	18	LP	Hotsy Duplex	Direct	Optional	50'	320
559	2.2	1300	2	115/1	18	NG	Hotsy Duplex	Direct	N/A	50'	330
560SS	2.1	1500	2.3	115/1	20	Oil	Hotsy Triplex	Direct	Std	50'	385
680SS	3.0	1000	2	115/1	20	Oil	Hotsy Triplex	Direct	Std	50'	385

SS=Stainless Steel

### OPTIONS

PART NO.	DESCRIPTION
835525	10" Natural Gas- or LP Gas-Fired Draft Diverter, Models 558 & 559
924889	8" Oil-Fired Draft Dampener, Models 444, 555SS, 560SS & 680SS
280771	Portagegear, Models 558 / 771
891113	Propane Tank, 43 lb.

### OPTIONS

PART NO.	DESCRIPTION
280588	Float Tank, 555SS (Field Install)
860202	360° Pivot Reel, 100'
860201	360° Pivot Reel, 200'

(Hose Reels fit Models 555SS, 560SS & 680SS)

## 700 SERIES

and Model 870SS

- Oil-Fired, LP- or Natural-Gas-Fired
- 7-Yr Pump Warranty
- Direct- & Belt-Drive



The **700 Series** offers a nice balance of Hotsy ruggedness and cleaning performance, yet the affordability of an entry-level machine. In addition to the four direct-drive models, this series also offers a belt-drive model that cleans at 3.5 GPM and 2000 PSI. The multiple fuel and electrical options makes the 700 series ideal for meeting the needs of commercial customers. All models are ETL safety certified and feature the Hotsy pump with a 7-year warranty.

MODEL	GPM	PSI	HP	VOLT/PH	AMP	FUEL	PUMP	DRIVE	PORTABILITY	HOSE	SHIP WT (lbs)
770SS	2.8	1500	3	208-230/1	20	Oil	Hotsy Triplex	Direct	Std	50'	435
771	2.8	1500	3	208-230/1	13	LP	Hotsy Triplex	Direct	Optional	50'	415
772	2.8	1500	3	208-230/1	13	NG	Hotsy Triplex	Direct	N/A	50'	415
790SS	2.8	2000	4TEFC	230/1	20	Oil	Hotsy Triplex	Belt	Std	50'	460
790SS-208	2.8	2000	4TEFC	208/1	22	Oil	Hotsy Triplex	Belt	Std	50'	460
795SS*	3.5	2000	5	230/1	24	Oil	Hotsy Triplex	Belt	Std	50'	500
795SS-208*	3.5	2000	5	208/1	27	Oil	Hotsy Triplex	Belt	Std	50'	500
870SS	3.5	2000	5	230/1	27	Oil	Hotsy Triplex	Direct	Std	50'	475

\*3450 RPM motor SS=Stainless Steel

### OPTIONS

PART NO.	DESCRIPTION
835525	10" Natural Gas- or LP Gas-Fired Draft Diverter, Models 771 & 772
924889	8" Oil-Fired Draft Dampener, Models 770SS, 790SS, 795SS & 870SS
280771	Portagegear, Models 558 / 771
891113	Propane Tank, 43 lb.

### OPTIONS

PART NO.	DESCRIPTION
860202	360° Pivot Reel, 100'
860201	360° Pivot Reel, 200'

(Hose Reels fit all 700 Series Models EXCEPT 771SS & 772SS)

## 900 SERIES

- Choose from Oil-Fired, LP-or Natural Gas-Fired
- Rugged Hotsy Pump with 7-Year Warranty
- Stainless-Steel Coil Skin
- Portable or Stationary
- ETL Safety Certified
- Electronic Ignition (NG and LP Models)



The **900 Series** takes on the heaviest of industrial cleaning jobs. Built with Hotsy ruggedness throughout, the 24 models provide a broad selection of fuel and electrical options—delivering the cleaning power of 3.9 GPM @2000 PSI or 3.8 GPM @ 2300 PSI. Oil-heated models come with a wheel kit for on-site portability. The 900 series of hot water pressure washers are backed by a market-leading 7-year warranty on the Hotsy pump.

MODEL	GPM	PSI	HP	MOTOR RPM	VOLT/PH	AMP	FUEL	PUMP	DRIVE	PORTABILITY	HOSE	SHIP WT (lbs)
980SS	3.9	2000	5	1725	230/1	29	Oil	Hotsy Triplex	Belt	Std	50'	580
981SS	3.9	2000	5	1725	230/1	25	LP	Hotsy Triplex	Belt	N/A	50'	550
982SS	3.9	2000	5	1725	230/1	25	NG	Hotsy Triplex	Belt	N/A	50'	550
990SS	3.9	2000	5	1725	230/3	19	Oil	Hotsy Triplex	Belt	Std	50'	580
990SS-208	3.9	2000	5	1725	208/3	20	Oil	Hotsy Triplex	Belt	Std	50'	580
991SS	3.9	2000	5	1725	230/3	16	LP	Hotsy Triplex	Belt	N/A	50'	545
991SS-208	3.9	2000	5	1725	208/3	18	LP	Hotsy Triplex	Belt	N/A	50'	545
992SS	3.9	2000	5	1725	230/3	16	NG	Hotsy Triplex	Belt	N/A	50'	545
992SS-208	3.9	2000	5	1725	208/3	18	NG	Hotsy Triplex	Belt	N/A	50'	545
993SS	3.9	2000	5	1725	460/3	10	Oil	Hotsy Triplex	Belt	Std	50'	580
994SS	3.9	2000	5	1725	460/3	8	LP	Hotsy Triplex	Belt	N/A	50'	545
995SS	3.9	2000	5	1725	460/3	8	NG	Hotsy Triplex	Belt	N/A	50'	545
950SS	3.8	2300	6.2	3450	230/1	30	Oil	Hotsy Triplex	Belt	Std	50'	590
950SS-208	3.8	2300	6.2	3450	208/1	33	Oil	Hotsy Triplex	Belt	Std	50'	590
952SS	3.8	2300	6.2	3450	230/1	27	NG	Hotsy Triplex	Belt	N/A	50'	560
952SS-208	3.8	2300	6.2	3450	208/1	28	NG	Hotsy Triplex	Belt	N/A	50'	560
960SS	3.8	2300	6.2	3450	230/3	19	Oil	Hotsy Triplex	Belt	Std	50'	580
960SS-208	3.8	2300	6.2	3450	208/3	20	Oil	Hotsy Triplex	Belt	Std	50'	580
962SS	3.8	2300	6.2	3450	230/3	17	NG	Hotsy Triplex	Belt	N/A	50'	550
962SS-208	3.8	2300	6.2	3450	208/3	18	NG	Hotsy Triplex	Belt	N/A	50'	550
963SS	3.8	2300	6.2	3450	460/3	9	Oil	Hotsy Triplex	Belt	Std	50'	580
964SS	3.8	2300	6.2	3450	460/3	7	NG	Hotsy Triplex	Belt	N/A	50'	550
967SS	3.8	2300	6.2	3450	575/3	9	Oil	Hotsy Triplex	Belt	Std	50'	580
969SS	3.8	2300	6.2	3450	575/3	7	NG	Hotsy Triplex	Belt	N/A	50'	550

OPTIONS	
PART NO.	DESCRIPTION
280495	Primary Remote Station (1st Remote)
216722	Additional Remote Station(s). Use for Additional Remotes After Primary Remote
280515	Remote Soap Option – Requires Remote Station Option, use on first remote station. Purchase additional switch – P/N 875985 and field wire for each additional remote station.
480400	Auto Start/Stop Kit (Factory Installed)
480401	Thermal Shutdown Kit (Factory Installed)
480404	Time Delay Shutdown (Factory Installed)
480403	LP Conversion-Series: 952SS, 962SS, 964SS & 969SS (Factory Installed)
835526	8" Natural Gas- or LP Gas-Fired Draft Diverter (Gas-fired models only)
924889	8" Oil-Fired Draft Dampener (Oil-fired models only)
7-1010	Regulator, LP Assembly
93-9001400	Portagear Kit (Oil-fired models only)
860202	360° Pivot Reel, 100' (Hose Reel fits all 900 Series Models)
860201	360° Pivot Reel, 200' (Hose Reel fits all 900 Series Models)

## 1400 SERIES

- Oil-Fired, LP-or Natural Gas-Fired
- Belt-Drive Hotsy Pump
- Stainless Steel Coil Skin
- ETL Safety Certified
- Electronic Ignition (NG and LP Models)



1410SS



Model 1412SS (Shown with optional hose reel. Portability not available on gas fired models)

The **1400 Series** packs the biggest punch of Hotsy's portable, electric-powered hot water pressure washers with a cleaning force of 3.9 GPM and 3000 PSI. Powered by a 7.5 HP, 1725 RPM or 8.2 HP, 3450 RPM Baldor motor with 24 configurations, including portable and stationary models, the 1400 series offers hours of non-stop heavy-duty cleaning of everything from trucks to heavy equipment. Besides its ruggedness, the 1400 series is also ETL certified to the rigid UL-1776 safety standards. All models come standard with a stainless steel coil skin.



MODEL	GPM	PSI	HP	MOTOR RPM	VOLT/PH	AMP	FUEL	PUMP	DRIVE	PORTABILITY	HOSE	SHIP WT (lbs)
1410SS	3.9	3000	7.5	1725	230/1	37	Oil	Hotsy Triplex	Belt	Std	50'	640
1411SS	3.9	3000	7.5	1725	230/1	34	LP	Hotsy Triplex	Belt	N/A	50'	610
1412SS	3.9	3000	7.5	1725	230/1	34	NG	Hotsy Triplex	Belt	N/A	50'	610
1420SS	3.9	3000	7.5	1725	230/3	25	Oil	Hotsy Triplex	Belt	Std	50'	640
1420SS-208	3.9	3000	7.5	1725	208/3	25	Oil	Hotsy Triplex	Belt	Std	50'	640
1421SS	3.9	3000	7.5	1725	230/3	24	LP	Hotsy Triplex	Belt	N/A	50'	605
1421SS-208	3.9	3000	7.5	1725	208/3	24	LP	Hotsy Triplex	Belt	N/A	50'	605
1422SS	3.9	3000	7.5	1725	230/3	24	NG	Hotsy Triplex	Belt	N/A	50'	605
1422SS-208	3.9	3000	7.5	1725	208/3	24	NG	Hotsy Triplex	Belt	N/A	50'	605
1423SS	3.9	3000	7.5	1725	460/3	14	Oil	Hotsy Triplex	Belt	Std	50'	640
1424SS	3.9	3000	7.5	1725	460/3	12	LP	Hotsy Triplex	Belt	N/A	50'	605
1425SS	3.9	3000	7.5	1725	460/3	12	NG	Hotsy Triplex	Belt	N/A	50'	605
1450SS	3.9	3000	8.2	3450	230/1	40	Oil	Hotsy Triplex	Belt	Std	50'	650
1450SS-208	3.9	3000	8.2	3450	208/1	44	Oil	Hotsy Triplex	Belt	Std	50'	650
1452SS	3.9	3000	8.2	3450	230/1	40	NG	Hotsy Triplex	Belt	N/A	50'	620
1452SS-208	3.9	3000	8.2	3450	208/1	42	NG	Hotsy Triplex	Belt	N/A	50'	615
1460SS	3.9	3000	8.2	3450	230/3	24	Oil	Hotsy Triplex	Belt	Std	50'	645
1460SS-208	3.9	3000	8.2	3450	208/3	25	Oil	Hotsy Triplex	Belt	Std	50'	645
1462SS	3.9	3000	8.2	3450	230/3	22	NG	Hotsy Triplex	Belt	N/A	50'	615
1462SS-208	3.9	3000	8.2	3450	208/3	23	NG	Hotsy Triplex	Belt	N/A	50'	645
1463SS	3.9	3000	8.2	3450	460/3	12	Oil	Hotsy Triplex	Belt	Std	50'	645
1464SS	3.9	3000	8.2	3450	460/3	11	NG	Hotsy Triplex	Belt	N/A	50'	615
1467SS	3.9	3000	8.2	3450	575/3	11	Oil	Hotsy Triplex	Belt	Std	50'	645
1469SS	3.9	3000	8.2	3450	575/3	10	NG	Hotsy Triplex	Belt	N/A	50'	615

### OPTIONS

PART NO.	DESCRIPTION
280495	Primary Remote Station (1st Remote)
216722	Additional Remote Station(s). Use for Additional Remotes After Primary Remote.
280515	Remote Soap Option – Requires Remote Station Option, use on first remote station. Purchase additional switch – P/N 875985 and field wire for each additional remote station.
480401	Thermal Shutdown Kit (Factory Installed)
480404	Time Delay Shutdown (Factory Installed)
480403	LP Conversion-Series: 1452SS, 1462SS, 1464SS & 1469SS (Factory Installed)
480400	Auto Start/Stop Kit (Factory Installed)
835526	8" Natural Gas- or LP Gas-Fired Draft Diverter (Gas-fired models only)
924889	8" Oil-Fired Draft Dampener (Oil-fired models only)
93-9001400	Portagear Kit (Oil-fired models only)
860202	360° Pivot Reel, 100' (Hose Reel fits all 1400 Series Models )
860201	360° Pivot Reel, 200' (Hose Reel fits all 1400 Series Models )

# 1800 SERIES



1812SS

- Natural Gas or LP-Fired
- Efficient: 510,000 BTU
- 7-Year Pump Warranty

- Electronic Ignition ■ Time Delay Shutdown ■ Thermal Shutdown ■ Remote Ready

The **1800 Series** is a compact, affordable solution for cleaning with hot water indoors. The 12 stationary models are electric-driven and natural gas or LP gas-heated, using Hotsy's high-efficiency vertical hot water coil. The coil skin comes standard with stainless steel. The cabinet is protected by a durable epoxy powder coat paint. Designed with the operator in mind, operating instructions and warnings are both multi-lingual and illustrated. The control panel is ideally positioned for easy access. This heavy-duty cleaning machine is ideal for use in manufacturing or even food processing facilities where hot water is needed for cleaning machinery and equipment indoors. All models are certified to the rigid UL-1776 safety standards.



MODEL	GPM	PSI	HP	VOLT/PH	AMP	FUEL	PUMP	DRIVE	HOSE	SHIP WT (lbs)
1812SS	5.9	2500	10	230/1	42	NG	Hotsy Triplex	Belt	50'	885
1812SS-208	5.9	2500	10	208/1	48	NG	Hotsy Triplex	Belt	50'	885
1822SS	5.9	2500	10	230/3	28	NG	Hotsy Triplex	Belt	50'	870
1822SS-208	5.9	2500	10	208/3	33	NG	Hotsy Triplex	Belt	50'	870
1825SS	5.9	2500	10	460/3	14	NG	Hotsy Triplex	Belt	50'	885
1836SS	5.9	2500	10	575/3	11	NG	Hotsy Triplex	Belt	50'	885
1852SS	4.7	3000	10	230/1	42	NG	Hotsy Triplex	Belt	50'	885
1852SS-208	4.7	3000	10	208/1	48	NG	Hotsy Triplex	Belt	50'	885
1855SS	4.7	3000	10	460/3	14	NG	Hotsy Triplex	Belt	50'	870
1856SS	4.7	3000	10	575/3	11	NG	Hotsy Triplex	Belt	50'	885
1862SS	4.7	3000	10	230/3	28	NG	Hotsy Triplex	Belt	50'	880
1862SS-208	4.7	3000	10	208/3	33	NG	Hotsy Triplex	Belt	50'	770

OPTIONS		OPTIONS	
PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
280495	Primary Remote Station (1st Remote)	280515	Remote Soap Option—Requires Remote Station Option, use on first remote station. Purchase additional switch—PN 875985, and field wire for each additional remote station.
216722	Additional Remote Station(s). Use for Additional Remotes After Primary Remote. Purchase of Primary Remote required.	480284	LP Conversion Kit (Factory Installed)
480241	Auto Start/Stop Kit (Factory Installed)	835525	10" Natural Gas- or LP Gas-Fired Draft Diverter

# 5700 SERIES



S5732-4

- Oil or Natural Gas-Fired
- Belt-Drive Hotsy Pump with 7-Year Warranty

- 15 HP Baldor Motor ■ Electronic Ignition ■ Time Delay Shutdown ■ Thermal Shutdown ■ 24-Volt Control

The **5700 Series** produces a punch like few other indoor or outdoor high-pressure cleaning machines. With its 15 HP Baldor motor driving the incomparable Hotsy Pump, backed by a 7-year warranty, the 5700 Series delivers cleaning power of up to 7.8 GPM and 3000 PSI. It is designed specifically to add up to four remote operating stations. The painted cabinet is protected by a durable epoxy powder coat finish. The control panel is positioned for easy operator access. This heavy-duty cleaning machine is ideal for cleaning indoors or outdoors with hot water and can be outfitted to heat with oil, diesel or natural gas. All models are certified to the rigid UL-1776 safety standards.



MODEL	GPM	PSI	HP	VOLT/PH	AMP	FUEL	PUMP	DRIVE	PORTABILITY	HOSE	SHIP WT (lbs)
S5730-3	7.8	3000	15	230/3	47	Oil	Hotsy Triplex	Belt	Optional	50'	1060
S5733-1	7.8	3000	15	460/3	25	Oil	Hotsy Triplex	Belt	Optional	50'	1070
S5730-5	7.8	3000	15	208/3	50	Oil	Hotsy Triplex	Belt	Optional	50'	1060
S5732-5	7.8	3000	15	208/3	42	NG	Hotsy Triplex	Belt	N/A	50'	985
S5732-4	7.8	3000	15	230/3	45	NG	Hotsy Triplex	Belt	N/A	50'	985
S5735-3	7.8	3000	15	460/3	23	NG	Hotsy Triplex	Belt	N/A	50'	975

OPTIONS		OPTIONS	
PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
280495	Primary Remote Station (1st Remote)	280515	Remote Soap Option—Requires Remote Station Option, use on remote station. Purchase additional switch – PN 875985, and field wire for each additional remote station.
216722	Additional Remote Station(s). Use for Additional Remotes After Primary Remote. Purchase of Primary Remote required.	292699	Portagear, Models S5730-3, S5730-5, S5733-1
480241	Auto Start/Stop Kit (Factory Installed)	835525	10" Natural Gas-Fired Draft Diverter

## GAS-ENGINE SERIES

- Oil-Fired
- 12 Volt DC
- Direct Drive
- 5 Battery-less Models
- 2 Electric-Start Models



871SS



781SS



921SS



965SS

The Gas Engine Series consist of the most compact and portable hot water pressure washers on the market. Powered by reliable gasoline engines, all you need is water and you can clean anywhere anytime. The seven models offer a broad range of cleaning power, from 2.5 to 3.8 GPM and from 2000 to 3500 PSI. All models (except 781SS) are backed by Hotsy's 7-year pump warranty and all are ETL safety certified.



1065SSE

MODEL	GPM	PSI	HP	ENGINE	BURNER	PUMP	DRIVE	PORTABILITY	HOSE	SHIP WT (lbs)
781SS*	2.5	2000	6	Robin	12V DC	Comet Axial	Direct	Std	50'	370
871SS*	2.7	2400	7	Robin	12V DC	Hotsy Triplex	Direct	Std	50'	370
921SS*	3.0	3000	9	Robin	12V DC	Hotsy Triplex	Direct	Std	50'	430
965SS*	3.0	3000	9	Honda	12V DC	Hotsy Triplex	Direct	Std	50'	450
1065SS*	3.5	3000	11	Honda	12V DC	Hotsy Triplex	Direct	Std	50'	495
1065SSE†	3.5	3000	11	Honda	12V DC	Hotsy Triplex	Direct	Std	50'	495
1075SSE†	3.8	3500	13	Honda	12V DC	Hotsy Triplex	Direct	Std	50'	500

\*Battery not required †12V battery required, but not supplied E= Electric-start engine

## 1200 SERIES and Model 5645

- Gas-Powered
- Oil-Fired
- Belt Drive
- Electric-start



1260SS



1270SS Shown with optional Portagear Kit



5645

The 1200 Series delivers some serious on-site, hot water cleaning capability of up to 6 GPM and 4000 PSI. Rugged gasoline engines all have electric start. Five models come with a 2000W generator. The self-contained cleaning units are built to hold up under the toughest of conditions. All feature the Hotsy pump, with its 7-year warranty and ETL safety certification (CSA-Certified for non-generator models).



MODEL	GPM	PSI	HP	ENGINE	BURNER	PUMP	DRIVE	PORTABILITY	HOSE	SHIP WT (lbs)
1260SS	4.3	3000	16	Vanguard	12V DC	Hotsy Triplex	Belt	Optional	50'	780
1260SSG*	4.3	3000	16	Vanguard	120V AC	Hotsy Triplex	Belt	Optional	50'	810
1270SS	4.5	4000	20	Honda	12V DC	Hotsy Triplex	Belt	Optional	50'	840
1270SSG*	4.5	4000	20	Honda	120V AC	Hotsy Triplex	Belt	Optional	50'	870
1280SS	5.2	3500	20	Honda	12V DC	Hotsy Triplex	Belt	Optional	50'	840
1280SSG*	5.2	3500	20	Honda	120V AC	Hotsy Triplex	Belt	Optional	50'	870
1290SS	5.6	3000	20	Honda	12V DC	Hotsy Triplex	Belt	Optional	50'	840
1290SSG*	5.6	3000	20	Honda	120V AC	Hotsy Triplex	Belt	Optional	50'	870
5645*	6.0	3000	24	Honda	120V AC	Hotsy Triplex	Belt	Optional	50'	1110

\*Models include a 2000W Generator †12V battery is required for all models, but is not supplied

### OPTIONS

PART NO.	DESCRIPTION
280199	Portagear Kit, Models 1260SS, 1260SSG, 1270SS, 1270SSG, 1280SS, 1280SSG, 1290SS and 1290SSG
292699	Portagear Kit, Model 5645

## 9400 SERIES Heating Modules

The 9400 Series heating modules give customers the flexibility to "convert" a cold water pressure washer into a hot water unit. By attaching the heating module to a cold water pressure washer the pressurized water is now heated to produce all the benefits of hot water cleaning. The four models use fuel oil, diesel or natural gas to heat the water using Hotsy's high-efficiency, vertical heating coil.



MODEL	GPM (Max)	GPM (Min)	VOLT/PH	AMP	BTU/HOUR	FUEL	SHIP WT (lbs)
9450	10	6	115/1	8	620,000	Oil-Fired	525
9452	10	6	115/1	1	540,000	Natural-Gas-Fired	500
9460	10	6	115/1	8	920,000	Oil-Fired	920
9462	10	6	115/1	1	920,000	Natural-Gas-Fired	935

OPTIONS	
PART NO.	DESCRIPTION
480291	Natural-Gas to LP Conversion for Model 9452 (Factory Installed)
480290	Natural-Gas to LP Conversion for Model 9462 (Factory Installed)
835525	10" Natural Gas-Fired Draft Diverter for Model 9452
835531	12" Natural Gas-Fired Draft Diverter for Model 9462

**Fuel-burner types available:**

- Diesel    ■ Kerosene    ■ Home Heating Oil
- Natural Gas    ■ Propane (Optional)

## Hotsy Hot-Water Pressure Washers

*Exceptional quality, high reliability and advanced features make Hotsy the industry's first choice in hot-water pressure washers.*

One look at Hotsy Hot-Water Pressure Washers tells you these are rugged, industrial-grade machines designed to give long life, high productivity and superior cleaning power.

As an industry leader and integrated manufacturer of pressure washers, Hotsy builds its own pumps, gun jets, valves and other key components critical to the long life and smooth operation of a Hotsy pressure washer.

After examining Hotsy's rugged designs and unique features, your customers will be convinced that a Hotsy Hot-Water Pressure Washer is the right machine for the job.

**Seven-year limited warranty** on Hotsy pumps—the best in the industry—protects this vital component.



ETL certification to UL 1776 standards meets stringent bid and application requirements.



**Upright burner design** provides maximum efficiency for fast heating, easy venting in indoor applications, plus excellent fuel economy.

- Upright burner design
- Industry's best heat exchanger
- Easy service design, accessible components
- Hotsy designed & specified components

## BD SERIES

**BELT DRIVE**

BD Series shown in large cage (4-wheel) version. Small cage 2-wheel version also available.



The **BD Series** is the most rugged cold water pressure washer on the market with its all-steel frame and cage, Hotsy belt-drive, triplex pump and cleaning power of up to 5000 PSI. Four gas models make up what is Hotsy's most durable cold water line-up ever.

- Honda or Vanguard engine
- Small & Large Roll Cage design with lifetime warranty
- Totally enclosed belt guard
- 13" tubed pneumatic tires for easy handling
- Plated steel high-pressure wand w/ side handle
- ETL certified to UL-1776 safety standards



MODEL	GPM	PSI	HP	ENGINE	PUMP/MODEL #	DRIVE	FRAME	NO. WHEELS	HOSE	SHIP WT (lbs)
BD-373539	3.7	3500	13	Honda GX	Hotsy Triplex	BELT	Small Cage	2	50'	290
BD-404029	4.0	4000	16	Vanguard	Hotsy Triplex	BELT	Large Cage	4	50'	360
BD-405039E*	4.0	5000	20	Honda GX	Hotsy Triplex	BELT	Large Cage	4	50'	417
BD-455039E*	4.5	5000	24	Honda GX	Hotsy Triplex	BELT	Large Cage	4	50'	430

\*E = Electric Start

OPTIONS		OPTIONS	
PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
35-356	E-Zee Hose Reel Kit*100' (small cage)	35-360	5000 PSI Hose Reel Kit* (large cage)
35-357	E-Zee Hose Reel Kit*100' (large cage)	35-362	5000 PSI Dual Hose Reel Kit,** (large cage)

## BX SERIES

**BELT DRIVE**

BX Series shown with optional hose reel & mounting kit.



The **BX Series** is the similarly rugged, but more compact, line of belt-drive cold water pressure washers. Powered by Honda GX engines, the BX series delivers cleaning of up to 3500 PSI and an all-steel frame protected by a durable powder coat finish. Hotsy pumps carry a 7-year warranty.

- Honda GX engines, 5.5 to 13 HP
- Steel frame with lifetime warranty
- Totally enclosed belt guard
- 13" tubed pneumatic tires for easy handling
- Insulated steel high-pressure wand w/ side handle
- ETL certified to UL-1776 safety standards



MODEL	GPM	PSI	HP	ENGINE	PUMP/MODEL #	DRIVE	HOSE	SHIP WT (lbs)
BX-282039	2.8	2000	5.5	Honda GX	Hotsy Triplex	BELT	50'	152
BX-252739	2.5	2700	6.5	Honda GX	Hotsy Triplex	BELT	50'	160
BX-303039	3.0	3000	9	Honda GX	Hotsy Triplex	BELT	50'	222
BX-373539	3.7	3500	13	Honda GX	Hotsy Triplex	BELT	50'	261

OPTIONS	
PART NO.	DESCRIPTION
35-350	EZ Hose Reel Kit 100' (incl. reel & mounting hardware)

## DB SERIES

**DIRECT DRIVE**

DB Series shown with optional hose reel & mounting kit.



The **DB Series** is the most compact, affordable alternative, in the cold water line featuring a direct-drive pump. All five models are powered by reliable Honda engines. Light-weight design and tubed pneumatic tires make for easy maneuvering.

- Honda GC or GX engines, 5 to 13 HP
- Steel frame with lifetime warranty
- 10" tubed pneumatic tires for easy handling
- Protected by a powder coat finish
- Insulated, 2-piece steel high-pressure wand
- ETL certified to UL-1776 safety standards



MODEL	GPM	PSI	HP	ENGINE	PUMP/MODEL #	DRIVE	HOSE	SHIP WT (lbs)
DB-232336	2.3	2300	5	Honda GC	Comet/Axial AXD2527G	DIRECT	30'	130
DB-232439	2.3	2400	5.5	Honda GX	Hotsy Triplex	DIRECT	50'	140
DB-252739	2.5	2700	6.5	Honda GX	Hotsy Triplex	DIRECT	50'	145
DB-303039	3.0	3000	9	Honda GX	Hotsy Triplex	DIRECT	50'	175
DB-383539	3.8	3500	13	Honda GX	Hotsy Triplex	DIRECT	50'	194

OPTIONS	
PART NO.	DESCRIPTION
35-352	EZ Hose Reel Kit 100' (incl. reel & mounting hardware)

## 1700 SERIES

**BELT DRIVE**



Shown with optional stainless steel cabinet

The **1700 Series** offers the most reliable stationary, electric-powered, cold water pressure washer featuring a Hotsy belt-drive pump with 7-year warranty, insulated variable pressure wand and ETL safety certification.



- Baldor electric motor, 2-10 HP
- Hotsy pump with 7-year warranty
- Downstream detergent injector
- Insulated SS variable pressure wand
- Hot Water Seal Kit standard
- Option-ready for time delay shutdown or automatic stop-start.

MODEL	GPM	PSI	HP	VOLT/PH	AMPS	PUMP/MODEL#	DRIVE	PORTABILITY	HOSE	SHIP WT (lbs)
1710	2.75	1000	2	120/1	20	Hotsy Triplex	BELT	Optional	50'	200
1720	3.9	2000	6	230/1	28	Hotsy Triplex	BELT	Optional	50'	275
1722	3.9	2000	6	208/1	30	Hotsy Triplex	BELT	Optional	50'	240
1723	3.9	2000	6	208/3	16	Hotsy Triplex	BELT	Optional	50'	250
1724	3.9	2000	6	230/3	14.4	Hotsy Triplex	BELT	Optional	50'	250
1725	3.9	2000	6	460/3	7.2	Hotsy Triplex	BELT	Optional	50'	250
1730	3.46	3000	7.5	230/1	36	Hotsy Triplex	BELT	Optional	50'	280
1732	3.46	3000	7.5	208/1	38	Hotsy Triplex	BELT	Optional	50'	280
1733	3.46	3000	7.5	208/3	23	Hotsy Triplex	BELT	Optional	50'	280
1734	3.46	3000	7.5	230/3	21.5	Hotsy Triplex	BELT	Optional	50'	280
1735	3.46	3000	7.5	460/3	11	Hotsy Triplex	BELT	Optional	50'	270
1740	4.76	3000	10	230/1	45	Hotsy Triplex	BELT	Optional	50'	305
1742	4.76	3000	10	208/1	45	Hotsy Triplex	BELT	Optional	50'	305
1743	4.76	3000	10	208/3	29	Hotsy Triplex	BELT	Optional	50'	302
1744	4.76	3000	10	230/3	26.8	Hotsy Triplex	BELT	Optional	50'	300
1745	4.76	3000	10	460/3	13.5	Hotsy Triplex	BELT	Optional	50'	315
1750	5.93	2500	10	230/1	45	Hotsy Triplex	BELT	Optional	50'	320
1752	5.93	2500	10	208/1	45	Hotsy Triplex	BELT	Optional	50'	320
1753	5.93	2500	10	208/3	29	Hotsy Triplex	BELT	Optional	50'	320
1754	5.93	2500	10	230/3	26.8	Hotsy Triplex	BELT	Optional	50'	310
1755	5.93	2500	10	460/3	13.5	Hotsy Triplex	BELT	Optional	50'	310

OPTIONS	1700 SERIES
PART NO.	DESCRIPTION
280700	Kit, 1700 Wheel w/Chemical Rack
280701	Kit, 1700 Wall Mount
280702	Kit, 1700 Floor Stand, Tall (20 3/4"W x 29"D x 36"H)
280703	Kit, Caster Wheels for 1700 Floor Stand
280704	Kit, Hose Reel w/Bracket, 1700 Stand & Wall Mount Kits
280705	Kit, 1700 Floor Stand, Short (20 3/4"W x 29"D x 24"H)
280712	Kit, 1700 Wall Mount, Stainless Steel
280710	Time Delay Shut Down, For 172x, 173x & 174x Models (Factory Installed)
280714	Time Delay Shut Down for 1710 (Factory Installed)
280713	Time Delay Shut Down for 175x Models (Factory Installed)
280711	Stainless Steel Base & Cover, 1700 Series (Factory Installed)
280717	Automatic Stop/Start for 1710 & 172x Models
280718	Automatic Stop/Start for 175x Models
280715	Automatic Stop/Start for 173x & 174x Models)



Model 1710 shown with optional wheel kit (PN 280700).



1700 Series shown with optional hose reel kit, (PN 280704), cart (PN 280702), caster wheel kit (PN 280703) and stainless steel base and cover (PN 280711).



# EP SERIES

**DIRECT DRIVE**



The **EP Series** offers a portable alternative to the electric-powered, cold water pressure washer line featuring the Hotsy direct-drive pump with a 7-year warranty. The EP's functional design is further enhanced by 10" tubed pneumatic tires, a convenient hose-and-gun rack and ETL safety certification.



- 1725 RPM Baldor electric motor
- Steel frame with lifetime warranty
- Hotsy pump with 7-year warranty
- Insulated wand and fatigue-free gun
- Powder coat finish protection
- ETL safety certification

MODEL	GPM	PSI	HP	VOLT/PH	AMPS	PUMP / MODEL #	DRIVE	HOSE	SHIP WT (lbs)
EP-201009D	2.0	1000	1.5	120/1	15	Hotsy Triplex	DIRECT	50'	151
EP-301009D	3.0	1000	2	120/1	20	Hotsy Triplex	DIRECT	50'	163
EP-301509A	3.0	1500	3	230/1	15	Hotsy Triplex	DIRECT	50'	157
EP-352009A	3.5	2000	5	230/1	20	Hotsy Triplex	DIRECT	50'	210

OPTIONS	EP SERIES
PART NO.	DESCRIPTION
35-354	EZ Hose Reel Kit 100' (incl. reel & mounting hardware)

## HAND-HELD COLD WATER PRESSURE WASHERS

# ET SERIES

Electric-Powered

**DIRECT DRIVE**



The **ET Series** provides a light-weight, hand-held alternative to the electric-powered line offering many of the same features that have distinguished the Hotsy name over the years, featuring a reliable direct-drive pump and ETL safety certification.



- Baldor electric motor, 1.5 - 2 HP
- Comet axial high-pressure pump
- Cleaning power of up to 1400 PSI
- Weighs as little as 80 lbs.
- Lifetime warranty on frame
- Convenient carrying handle

MODEL	GPM	PSI	HP	VOLT/PH	AMPS	PUMP/MODEL #	DRIVE	HOSE	SHIP WT (lbs)
ET-201006D	2.0	1000	1.5	120/1	15	Comet AXD2020E	DIRECT	30'	90
ET-201406D	1.8	1400	2	120/1	20	Comet AXD2020E	DIRECT	30'	103

# HC SERIES

Gasoline-Powered

**DIRECT DRIVE**



The **HC Series** is the hand-held model of the gasoline-powered line, delivering cleaning capability of up to 2400 PSI. Both models are driven by Honda engines and feature reliable direct-drive pumps and are ETL safety certified.



- Honda engines, 5 - 5.5 HP
- Direct-drive high-pressure pumps
- Cleaning power of up to 2400 PSI
- Weighs as little as 70 lbs.
- Lifetime warranty on frame
- Convenient carrying handle

MODEL	GPM	PSI	HP	ENGINE	PUMP/MODEL #	DRIVE	HOSE	SHIP WT (lbs)
HC-232336	2.3	2300	5	Honda GC	Comet/Axial	DIRECT	30'	74
HC-232439	2.3	2400	5.5	Honda GX	HotsyTriplex	DIRECT	30'	108

## Choose From 7 Different Series!

Hotsy's extensive line of front-loading automatic parts washers gives you a choice of load capacities ranging from 750 lbs. to 5,000 lbs. and internal load heights from 32" to 60".



**Easy access debris screen** prevents foreign objects from falling into reservoir.




**Integrated oil-skimmer** helps remove oil from cleaning solution in reservoir.

**Recessed base** provides ample foot clearance for easy loading and unloading.



**Sump access panels** make for easier sump cleanout.

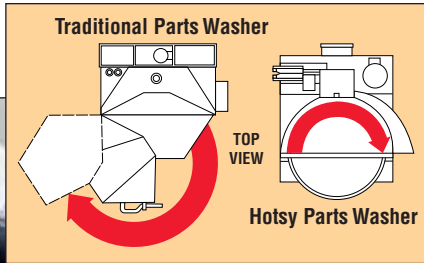

**Hotsy's unique internal roll-away door** saves floor space and prevents wash water from dripping on the shop floor.

## 7530 SERIES



- Vertical Seal-less Pump
  - 3 HP
  - 50 GPM
  - 45 PSI
- 750 lbs. Load Capacity
- 50 Gal. Sump Capacity
- 6 kW Heater

**70"H x 43"W x 49"D**

Includes: Oil Drain Container, Small Parts Basket, Parts Tree, and Containment Ring



MODEL	WORKING HEIGHT	TURNTABLE DIAMETER	VOLT/PH	AMPS	SHIP WT (lbs)
7530	32"	26"	230/1	38	793
7532	32"	26"	230/3	23	793
7533	32"	26"	460/3	11	793
7534	32"	26"	575/3	9	793
7530-SS	32"	26"	230/1	38	793
7532-SS	32"	26"	230/3	23	793
7533-SS	32"	26"	460/3	11	793
7534-SS	32"	26"	575/3	9	793
7530R	32"	26"	230/1	38	793
7532R	32"	26"	230/3	23	793
7533R	32"	26"	460/3	11	793
7534R	32"	26"	575/3	9	793
7530R-SS	32"	26"	230/1	38	793
7532R-SS	32"	26"	230/3	23	793
7533R-SS	32"	26"	460/3	11	793
7534R-SS	32"	26"	575/3	9	793

R=Rinse, SS= Stainless Steel

## 7650 SERIES



- Vertical Seal-less Pump
  - 3 HP
  - 50 GPM
  - 45 PSI
- 750 lbs. Load Capacity
- 65 Gal. Sump Capacity
- 6 kW Heater

**78"H x 47"W x 53"D**

Includes: Oil Drain Container, Small Parts Basket, Parts Tree, and Containment Ring



MODEL	WORKING HEIGHT	TURNTABLE DIAMETER	VOLT/PH	AMPS	SHIP WT (lbs)
7650	40"	30"	230/1	38	890
7652	40"	30"	230/3	23	890
7653	40"	30"	460/3	11	890
7654	40"	30"	575/3	9	890
7650-SS	40"	30"	230/1	38	890
7652-SS	40"	30"	230/3	23	890
7653-SS	40"	30"	460/3	11	890
7654-SS	40"	30"	575/3	9	890
7650R	40"	30"	230/1	38	890
7652R	40"	30"	230/3	23	890
7653R	40"	30"	460/3	11	890
7654R	40"	30"	575/3	9	890
7650R-SS	40"	30"	230/1	38	890
7652R-SS	40"	30"	230/3	23	890
7653R-SS	40"	30"	460/3	11	890
7654R-SS	40"	30"	575/3	9	890

R=Rinse, SS= Stainless Steel

## 7660 SERIES



- Vertical Seal-less Pump
  - 5 HP
  - 110 GPM
  - 50 PSI
- 750 lbs. Load Capacity
- 65 Gal. Sump Capacity
- 9 kW Heater

**88"H x 47"W x 53"D**

Includes: Oil Drain Container, Small Parts Basket, Parts Tree, and Containment Ring



MODEL	WORKING HEIGHT	TURNTABLE DIAMETER	VOLT/PH	AMPS	SHIP WT (lbs)
7660	50"	30"	230/1	52	929
7662	50"	30"	230/3	36	929
7663	50"	30"	460/3	17	929
7664	50"	30"	575/3	14	929
7662-SS	50"	30"	230/3	36	929
7663-SS	50"	30"	460/3	17	929
7664-SS	50"	30"	575/3	14	929
7662R	50"	30"	230/3	36	929
7663R	50"	30"	460/3	17	929
7664R	50"	30"	575/3	14	929
7662R-SS	50"	30"	230/3	36	929
7663R-SS	50"	30"	460/3	17	929
7664R-SS	50"	30"	575/3	14	929

R=Rinse, SS= Stainless Steel

# 7730 SERIES



- Vertical Seal-less Pump
    - 5 HP
    - 110 GPM
    - 50 PSI
  - 2500 lbs. Load Capacity
  - 113 Gal. Sump Capacity
  - 15 kW Heater
- 83"H x 57"W x 65"D**



Includes: Oil Drain Container, Small Parts Basket, Parts Tree, and Containment Ring

MODEL	WORKING HEIGHT	TURNTABLE DIAMETER	VOLT/PH	AMPS	SHIP WT (lbs)
7732	36"	36"	230/3	51	1707
7733	36"	36"	460/3	25	1707
7734	36"	36"	575/3	19	1707
7732-SS	36"	36"	230/3	51	1707
7733-SS	36"	36"	460/3	25	1707
7734-SS	36"	36"	575/3	19	1707
7732R	36"	36"	230/3	51	1707
7733R	36"	36"	460/3	25	1707
7734R	36"	36"	575/3	19	1707
7732R-SS	36"	36"	230/3	51	1707
7733R-SS	36"	36"	460/3	25	1707
7734R-SS	36"	36"	575/3	19	1707

R=Rinse, SS= Stainless Steel

# 7870 SERIES



Shown with optional filters

- Vertical Seal-less Pump
    - 7.5 HP
    - 200 GPM
    - 50 PSI
  - 2500 lbs. Load Capacity
  - 156 Gal. Sump Capacity
  - 18 kW Heater
- 106"H x 66"W x 75"D**



Includes: Oil Drain Container, Small Parts Basket, Parts Tree, and Containment Ring

MODEL	WORKING HEIGHT	TURNTABLE DIAMETER	VOLT/PH	AMPS	SHIP WT (lbs)
7872	60"	48"	230/3	67	2288
7873	60"	48"	460/3	32	2288
7874	60"	48"	575/3	26	2288
7872-SS	60"	48"	230/3	67	2288
7873-SS	60"	48"	460/3	32	2288
7874-SS	60"	48"	575/3	26	2288
7872R	60"	48"	230/3	67	2288
7873R	60"	48"	460/3	32	2288
7874R	60"	48"	575/3	26	2288
7872R-SS	60"	48"	230/3	67	2288
7873R-SS	60"	48"	460/3	32	2288
7874R-SS	60"	48"	575/3	26	2288

R=Rinse, SS= Stainless Steel

# 7740 SERIES



- Vertical Seal-less Pump
    - 7.5 HP
    - 200 GPM
    - 50 PSI
  - 2500 lbs. Load Capacity
  - 113 Gal. Sump Capacity
  - 15 kW Heater
- 95"H x 57"W x 65"D**



Includes: Oil Drain Container, Small Parts Basket, Parts Tree, and Containment Ring

MODEL	WORKING HEIGHT	TURNTABLE DIAMETER	VOLT/PH	AMPS	SHIP WT (lbs)
7742	48"	36"	230/3	58	1869
7743	48"	36"	460/3	28	1869
7744	48"	36"	575/3	22	1869
7742-SS	48"	36"	230/3	58	1869
7743-SS	48"	36"	460/3	28	1869
7744-SS	48"	36"	575/3	22	1869
7742R	48"	36"	230/3	58	1869
7743R	48"	36"	460/3	28	1869
7744R	48"	36"	575/3	22	1869
7742R-SS	48"	36"	230/3	58	1869
7743R-SS	48"	36"	460/3	28	1869
7744R-SS	48"	36"	575/3	22	1869

# 7950 SERIES



Shown with optional filters

- Vertical Seal-less Pump
    - 7.5 HP
    - 200 GPM
    - 50 PSI
  - 5000 lbs. Load Capacity
  - 275 Gal. Sump Capacity
  - 36 kW Heater
- 96"H x 78.5"W x 90"D**



Includes: Oil Drain Container, Small Parts Basket, Parts Tree, and Containment Ring

MODEL	WORKING HEIGHT	TURNTABLE DIAMETER	VOLT/PH	AMPS	SHIP WT (lbs)
7952	48"	60"	230/3	110	2681
7953	48"	60"	460/3	55	2681
7954	48"	60"	575/3	45	2681
7952-SS	48"	60"	230/3	110	2681
7953-SS	48"	60"	460/3	55	2681
7954-SS	48"	60"	575/3	45	2681
7952R	48"	60"	230/3	110	2681
7953R	48"	60"	460/3	55	2681
7954R	48"	60"	575/3	45	2681
7952R-SS	48"	60"	230/3	110	2681
7953R-SS	48"	60"	460/3	55	2681
7954R-SS	48"	60"	575/3	45	2681

PART NO.	DESCRIPTION	7530	7650	7660	7730	7740	7870	7950
<b>AUTOMATIC WATER FILL</b>								
200.170	Automatic Water Fill	■	■	■				
200.170-04	Automatic Water Fill				■	■		
200.170-05	Automatic Water Fill						■	■
<b>CONTAINMENT RINGS</b>								
200.185	Containment Ring, 26"	■						
200.206	Containment Ring, 26" Stainless Steel	■						
200.186	Containment Ring, 30"		■	■				
200.208	Containment Ring, 30" Stainless Steel		■	■				
200.174	Containment Ring, 36"				■	■		
200.209	Containment Ring, 36" Stainless Steel				■	■		
200.175	Containment Ring, 48"						■	
200.210	Containment Ring, 48" Stainless Steel						■	
200.670	Containment Ring, 60"							■
200.671	Containment Ring, 60" Stainless Steel							■
<b>DETAIL &amp; POWER BRUSH</b>								
200.007-08	Detail Brush (with pump)	■						
200.007-09	Detail Brush (with pump)		■	■				
200.007-05	Detail Brush (with pump)				■	■		
200.007-06	Detail Brush (with pump)						■	■
200.023-01	Power Brush (pneumatic)	■	■	■	■	■	■	■
200.006-05	Detail & Power Brush Complete Kit	■						
200.006-06	Detail & Power Brush Complete Kit		■					
200.006-07	Detail & Power Brush Complete Kit			■				
<b>FILTRATION SYSTEM</b>								
200.321	Filtration (Factory Installed)	■						
200.323	Filtration, Stainless Steel (Factory Installed)	■						
200.325	Filtration & Sump Sweep (Factory Installed)	■						
200.327	Filtration & Sump Sweep, Stainless Steel (Factory Installed)	■						
200.322	Filtration (Field Installed)	■						
200.324	Filtration, Stainless Steel (Field Installed)	■						
200.326	Filtration & Sump Sweep (Field Installed)	■						
200.328	Filtration & Sump Sweep, Stainless Steel (Field Installed)	■						
200.329	Filtration (Factory Installed)	■	■					
200.331	Filtration, Stainless Steel (Factory Installed)		■	■				
200.333	Filtration & Sump Sweep (Factory Installed)		■	■				
200.335	Filtration & Sump Sweep, Stainless Steel (Factory Installed)		■	■				
200.330	Filtration (Field Installed)		■	■				
200.332	Filtration, Stainless Steel (Field Installed)		■	■				
200.334	Filtration & Sump Sweep (Field Installed)		■	■				
200.336	Filtration & Sump Sweep, Stainless Steel (Field Installed)		■	■				
200.315	Filtration (Factory Installed)				■			
200.311	Filtration, Stainless Steel (Factory Installed)				■			
200.314	Filtration & Sump Sweep (Factory Installed)				■			
200.310	Filtration & Sump Sweep, Stainless Steel (Factory Installed)				■			
200.545	Filtration (Field Installed)				■			
200.838	Filtration, Stainless Steel (Field Installed)				■			
200.472	Filtration, 2 Stage (Factory Installed)					■		
200.509	Filtration, 2 Stage Stainless Steel (Factory Installed)					■		
200.495	Filtration & Sump Sweep, 2 Stage (Factory Installed)					■		
200.197	Filtration & Sump Sweep, 2 Stage Stainless (Factory Installed)					■		
200.508	Filtration, 2 Stage (Factory Installed)						■	■
200.510	Filtration, 2 Stage Stainless Steel (Factory Installed)						■	■
200.507	Filtration & Sump Sweep, 2 Stage (Factory Installed)						■	■
200.319	Filtration & Sump Sweep, 2 Stage Stainless Steel (Fact. Inst.)						■	■
<b>INSERTS-DEBRIS SCREEN</b>								
200.338	60 Mesh Insert for Debris Screen Tray	■						
200.340	60 Mesh Insert for Debris Screen Tray		■	■				
200.341	60 Mesh Insert for Debris Screen Tray				■	■		
200.342	60 Mesh Insert for Debris Screen Tray						■	
<b>PARTS TREE</b>								
200.184	Parts Tree, 4 Hook	■	■	■				
200.218	Parts Tree, 4 Hook, Stainless Steel	■	■	■				
200.021	Parts Tree, 4 Hook				■	■	■	■
200.213	Parts Tree, 4 Hook, Stainless Steel				■	■	■	■

continued on next page

PART NO.	DESCRIPTION	7530	7650	7660	7730	7740	7870	7950
<b>HEIGHT EXTENSION (All Factory Installed-May Require a Heater Upgrade)</b>								
200.351	Height Extension, 6"			■				
200.352	Height Extension, 6" Stainless Steel			■				
200.012	Height Extension, 6"					■		
200.201	Height Extension, 6" Stainless Steel					■		
200.640	Height Extension, 6"						■	
200.641	Height Extension, 6" Stainless Steel						■	
200.642	Height Extension, 12"						■	
200.643	Height Extension, 12" Stainless Steel						■	
200.578	Height Extension, 12"							■
200.646	Height Extension, 12" Stainless Steel							■
200.647	Height Extension, 24"							■
200.648	Height Extension, 24" Stainless Steel							■
<b>PUMP UPGRADES (All Factory Installed)</b>								
200.029	Pump Upgrade, 3HP to 5HP, 230V 1PH	■	■					
200.461	Pump Upgrade, 3HP to 5HP, 230V 1PH, SS	■	■					
200.466	Pump Upgrade, 3HP to 5HP, 230V 3PH	■	■					
200.467	Pump Upgrade, 3HP to 5HP, 230V 3PH, SS	■	■					
200.552	Pump Upgrade, 3HP to 5HP, 460V 3PH	■	■					
200.553	Pump Upgrade, 3HP to 5HP, 460V 3PH, SS	■	■					
200.576	Pump Upgrade, 3HP to 5HP, 575V 3PH	■	■					
200.026	Pump Upgrade, 5HP to 7.5HP, 230V 3PH				■			
200.464	Pump Upgrade, 5HP to 7.5HP, 230V 3PH, SS				■			
200.554	Pump Upgrade, 5HP to 7.5HP, 460V 3PH				■			
200.555	Pump Upgrade, 5HP to 7.5HP, 460V 3PH, SS				■			
200.636	Pump Upgrade, 5HP to 7.5HP, 575V 3PH				■			
200.637	Pump Upgrade, 5HP to 7.5HP, 575V 3PH, SS				■			
200.027	Pump Upgrade, 7.5HP to 10HP, 230V 3PH						■	■
200.465	Pump Upgrade, 7.5HP to 10HP, 230V 3PH, SS						■	■
200.556	Pump Upgrade, 7.5HP to 10HP, 460V 3PH						■	■
200.557	Pump Upgrade, 7.5HP to 10HP, 460V 3PH, SS						■	■
200.644	Pump Upgrade, 7.5HP to 10HP, 575V 3PH						■	■
200.645	Pump Upgrade, 7.5HP to 10HP, 575V 3PH, SS						■	■
<b>TIMERS</b>								
200.132	Timer, Heater 24 hour 7 day (Factory Installed)	■	■	■				
200.226	Timer, Heater 24 hour 7 day (Field Installed)	■	■	■				
200.131	Timer, Heater & Skimmer 24 hour 7 day (Factory Installed)	■	■	■				
200.227	Timer, Heater & Skimmer 24 hour 7 day (Field Installed)	■	■	■				
200.132-05	Timer, Heater 24 hour 7 day (Factory Installed)				■	■	■	■
200.226-05	Timer, Heater 24 hour 7 day (Field Installed)				■	■	■	■
200.131-05	Timer, Heater & Skimmer 24 hour 7 day (Factory Installed)				■	■	■	■
200.227-05	Timer, Heater & Skimmer 24 hour 7 day (Field Installed)				■	■	■	■
<b>TURNTABLE MATS</b>								
200.415	Rubber Turntable Mat	■						
200.416	Rubber Turntable Mat		■	■				
200.417	Rubber Turntable Mat				■	■		
200.042	Rubber Turntable Mat						■	
200.649	Rubber Turntable Mat							■
<b>TWO-TIER TURNTABLES (All Factory Installed)</b>								
200.189	Two-Tier Turntable	■						
200.223	Two-Tier Turntable, Stainless Steel	■						
200.190	Two-Tier Turntable		■					
200.220	Two-Tier Turntable, Stainless Steel		■					
200.548	Two-Tier Turntable			■				
200.551	Two-Tier Turntable, Stainless Steel			■				
200.033	Two-Tier Turntable				■			
200.224	Two-Tier Turntable, Stainless Steel				■			
200.547	Two-Tier Turntable					■		
200.549	Two-Tier Turntable, Stainless Steel					■		
200.836	Two-Tier Turntable						■	
200.837	Two-Tier Turntable, Stainless Steel						■	
200.650	Two-Tier Turntable							■
200.651	Two-Tier Turntable, Stainless Steel							■
<b>MISCELLANEOUS</b>								
200.002	Casters - Factory Installed	■	■	■	■	■		
200.138	Hour Meter	■	■	■	■	■	■	■
200.162	Light Duty Small Parts Basket (8"x 8"x 4")	■	■	■	■	■	■	■
200.016	Oil Drain Container	■	■	■	■	■	■	■
200.212	Oil Drain Container, Stainless	■	■	■	■	■	■	■
502.703	Touch Up Paint, Taupe, Spray Can	■	■	■	■	■	■	■
21-190	Evaporator, Wastewater Drum (FOB Camas, WA)	■	■	■	■	■	■	■

## 7230 SERIES



The **7230 Series** is a compact top-load, automatic, aqueous parts washer with a 22" turntable and 16" work height that fits most commercial applications.

- Pump with Close-Coupled Seals
  - 1 HP • 28 GPM • 30 PSI
- 500 lbs. Load Capacity
- 23 Gal. Sump Capacity

Includes: Small Parts Basket and Containment Ring

50"H x 34"W x 44"D



MODEL	WORK HEIGHT	TURNTABLE DIAMETER	VOLT/PH	HEATER kW	AMPS	SHIP WT (lbs)
S7230-1	16"	22"	115/1	2	15	461
7230A	16"	22"	230/1	4.5	28	461
7232	16"	22"	230/3	6	20	461
7233	16"	22"	460/3	6	10	461
7234	16"	22"	575/3	6	8	461
S7230-1-SS	16"	22"	115/1	2	15	461
7230A-SS	16"	22"	230/1	4.5	28	461
7232-SS	16"	22"	230/3	6	20	461
7233-SS	16"	22"	460/3	6	10	461
7234-SS	16"	22"	575/3	6	8	461

**NEW!**

**7230 Series models now standard equipped with Automatic Oil Skimmer**

## 7320 SERIES

The **7320 Series** is our largest and most industrial top-load, automatic, aqueous parts washer with a 25" turntable driven by a 3HP and working height of up to 18".



- Vertical Seal-less Pump
  - 3HP
  - 50 GPM
  - 45 PSI
- 500 lbs. Load Capacity
- 50 Gal. Sump Capacity

Includes: Oil Drain Container, Small Parts Basket, and Containment Ring

50"H x 40"W x 50.5"D



Shown with options

MODEL	WORK HEIGHT	TURNTABLE DIAMETER	VOLT/PH	HEATER kW	AMPS	SHIP WT (lbs)
7320A	18"	25"	230/1	6	38	722
7322	18"	25"	230/3	6	23	722
7323	18"	25"	460/3	6	11	722
7324	18"	25"	575/3	6	9	722
7320A-SS	18"	25"	230/1	6	38	722
7322-SS	18"	25"	230/3	6	23	722
7323-SS	18"	25"	460/3	6	11	722
7324-SS	18"	25"	575/3	6	9	722

OPTIONS	7230 SERIES
PART NO.	DESCRIPTION
<b>CONTAINMENT RINGS</b>	
200.171	Containment Ring, 22"
200.204	Containment Ring, 22", Stainless Steel
<b>DETAIL &amp; POWER BRUSH</b>	
200.007	Detail Brush (with pump)
200.023-01	Power Brush (pneumatic)
200.006-03	Detail and Power Brush Complete Kit
<b>TIMERS</b>	
200.468	Timer, Heater, 7 day wall outlet 20 amp for S7230-1 only (Factory Installed)
200.132-02	Timer, Heater, 7 day (Factory Installed)
200.226-02	Timer, Heater, 7 day (Field Installed)
200.131-02	Timer, Heater & Skimmer, 7 day (Factory Installed)
200.227-02	Timer, Heater & Skimmer, 7 day (Field Installed)
<b>MISCELLANEOUS</b>	
200.170-06	Automatic Water Fill
200.162	Light Duty Small Parts Basket (8"x 8"x 4")
200.138	Hour Meter
200.015	60 Mesh Insert for Debris Screen Tray
200.285	Handlebar (Factory or Field Installed)
200.413	Rubber Turntable Mat
502.703	Touch Up Paint, Taupe, Spray Can
21-190	Evaporator, Wastewater Drum (FOB Camas, WA)

OPTIONS	7320 SERIES
PART NO.	DESCRIPTION
<b>CONTAINMENT RINGS</b>	
200.172	Containment Ring, 25"
200.207	Containment Ring, 25" Stainless Steel
<b>DETAIL &amp; POWER BRUSH</b>	
200.007-07	Detail Brush (with pump)
200.023-01	Power Brush (pneumatic)
200.006-04	Detail and Power Brush Complete Kit
<b>FILTRATION (All Factory Installed, unless otherwise specified)</b>	
200.009	Filtration
200.010	Filtration & Sump Sweep
200.196	Filtration, Stainless Steel
200.198	Filtration & Sump Sweep, Stainless Steel
200.543	Filtration (Field Installed)
200.544	Filtration & Sump Sweep (Field Installed)
<b>PUMP UPGRADES (All Factory Installed)</b>	
200.029	Pump Upgrade, 3HP to 5HP, 230V 1PH
200.461	Pump Upgrade, 3HP to 5HP, 230V 1PH, SS
200.466	Pump Upgrade, 3HP to 5HP, 230V 3PH
200.467	Pump Upgrade, 3HP to 5HP, 230V 3PH, SS
200.552	Pump Upgrade, 3HP to 5HP, 460V 3PH
200.553	Pump Upgrade, 3HP to 5HP, 460V 3PH, SS
200.576	Pump Upgrade, 3HP to 5HP, 575V 3PH
<b>TIMERS</b>	
200.131-03	Timer, Heater & Skimmer 24 hour 7 day (Factory Installed)
200.132-03	Timer, Heater 24 hour 7 day (Factory Installed)
200.226-03	Timer, Heater 24 hour 7 day (Field Installed)
200.227-03	Timer, Heater & Skimmer 24 hour 7 day (Field Installed)
<b>MISCELLANEOUS</b>	
200.170-01	Automatic Water Fill
200.162	Light Duty Small Parts Basket (8"x 8"x 4")
200.138	Hour Meter
200.343	60 Mesh Insert for Debris Screen Tray
200.414	Rubber Turntable Mat
200.002	Casters
200.016	Oil Drain Container
200.212	Oil Drain Container, Stainless Steel
502.703	Touch Up Paint, Taupe, Spray Can
21-190	Evaporator, Wastewater Drum (FOB Camas, WA)

# PASS-THROUGH AUTOMATIC PARTS WASHER

## 8600 SERIES CONVEYOR MODEL

58"H x 62"W x 58"D



The **8600 Series** is a compact conveyor parts washer ideal for manufacturing plants and other applications where in-line cleaning is needed. The single-stage, pass-through model has a 16-inch wide steel mesh (1"x1") conveyor belt with tunnel height of up to 10 inches, large enough for most industrial cleaning needs. The 60-inch long conveyor belt's speed is adjustable and the wash tunnel features a 360-degree spray manifold, which is easily accessed by a lift-up lid. A conveniently located slide-out debris tray, a sloped tank and fully automated 12-inch stainless steel disc oil skimmer eliminate maintenance headaches associated with other systems.

- Vertical Seal-less Pump
  - 5 HP
  - 110 GPM
  - 45 PSI
- 250 lbs. Load Capacity
- 115 Gal. Sump Capacity
- 27 kW Heater
- Belt Speed 0 to 8 feet per minute

MODEL	CONVEYOR WIDTH	CONVEYOR LENGTH	VOLT/PH	AMPS	HEATER KW	SHIP WT (lbs)
8602	16"	60"	230/3	77	27	1234
8603	16"	60"	460/3	39	27	1234
8604	16"	60"	575/3	31	27	1234
8602-SS	16"	60"	230/3	77	27	1234
8603-SS	16"	60"	460/3	39	27	1234
8604-SS	16"	60"	575/3	31	27	1234

### OPTIONS 8600 SERIES

PART NO.	DESCRIPTION
200.841	Adjustable Guide Rails
200.842	Filtration (Factory Installed)
200.843	Filtration, Stainless Steel (Factory Installed)
200.844	Shop Air Blow Off (Includes filter/regulator and one top-mounted, height-adjustable 12" air knife)
200.845	Timer, Heater 24 Hour 7 Day (Factory Installed)
200.846	Timer, Heater 24 Hour 7 Day (Field Installed)
200.847	Timer, Heater & Skimmer 24 Hour 7 Day Timer (Factory Inst.)
200.848	Timer, Heater & Skimmer 24 Hour 7 Day Timer (Field Inst.)
200.849	1/2" x 1/2" Flat Wire Conveyor Belt
200.850	1/2" x 1/2" Flat Wire Conveyor Belt, Stainless Steel
502.703	Touch Up Paint, Taupe, Spray Can
21-190	Evaporator, Wastewater Drum (FOB Camas, WA)

# MANUAL PARTS WASHER

## MODEL 205

42"H x 39"W x 29"D



The **205 or Manual Parts Washer** is an extra-rugged hot water sink featuring a 304 stainless steel sink and cabinet. Its industrial-duty, vertical seal-less pump has proven especially reliable and forgiving over the years so there's no need for an expensive debris filtration system. Mounted on four caster wheels, the 205 can be moved about the shop with ease and even wheeled under a raised vehicle to rinse the underside without having to remove the parts. All key components, including an automated, stainless steel oil skimmer, are tucked out of the way on a recessed shelf on the back of the cabinet.

- Vertical Seal-less Pump
  - 1/6 HP
  - 2.5 GPM
  - 8 PSI
- 250 lbs. Load Capacity
- 21 Gal. Sump Capacity
- 1.25 kW Heater

MODEL	SINK	VOLT/PH	AMPS	HEATER KW	SHIP WT (lbs)
205	36 x 26 x 10	115/1	9.5	1.25	303

### OPTIONS MODEL 205

PART NO.	DESCRIPTION
200.170-02	Automatic Water Fill
200.471	Power Brush (Field Installed)
200.496	Filtration (Factory Installed)
200.273	Timer-24 Hour 115 V 15 Amp (Field Installed)
200.444	Work Light (Field Installed)
200.445	Magnetic Tool Holder (Field Installed)
200.016C	Oil Drain Container
200.212C	Oil Drain Container, Stainless Steel
21-190	Evaporator, Wastewater Drum (FOB Camas, WA)